

INFINITY

BATTERY

IT7.2-12 F2

RECHARGEABLE SEALED LEAD ACID (VRLA) BATTERY

Nominal Voltage 12 Volt
20 Hour Rate Capacity 7.2 Ah



Dimensions	Inches	mm
Length	5.94	151
Width	2.56	65
Case Height	3.70	94
Terminal Height	4.02	102

Weight (Approx.)	Lbs.	Kg
	5.40	2.45

Constant Current Discharge Characteristics at 73.4°F (23°C)

Case Material A.B.S. (UL94-HB)

Terminal Faston Type 250 (F2)

Maximum Short Duration Discharge Current
 (5 Seconds or Less) 108 Amperes
 (10 Seconds or Less) 72 Amperes
 (60 Seconds or Less) 43.2 Amperes

Internal Resistance (Fully Charged Battery)
 (Approximately) 22 mOhm


Energy Density (@ 20 Hour Rate)
 1.53 Watt-Hours/Cubic Inch (93.65 Watt-Hours/Litre)

Specific Energy (@ 20 Hour Rate)
 16 Watt-Hours / Pound (35.27 Watt-Hours / Kg)

Operating Temperature Range
Discharge 5°F (-15°C) ~ 122°F (50°C)
Recharge 32°F (0°C) ~ 104°F (40°C)
Storage 32°F (0°C) ~ 104°F (40°C)

Self Discharge Rate
 About 3% / Month @ 68~77°F (20~25°C)

Discharge Time	Discharge Amperes	Capacity in Ah's	Final Voltage	Discharge C-Rate
20.0 Hrs	0.36	7.20	10.50	0.05
9.2 Hrs	0.72	6.66	10.50	0.10
5.0 Hrs	1.22	6.10	10.29	0.17
4.1 Hrs	1.44	5.86	10.20	0.20
2.1 Hrs	2.52	5.36	9.94	0.35
64.0 Mins	4.32	4.61	9.54	0.6
32.5 Mins	7.20	3.89	9.00	1.0
7.2 Mins	21.6	2.58	6.00	3.0

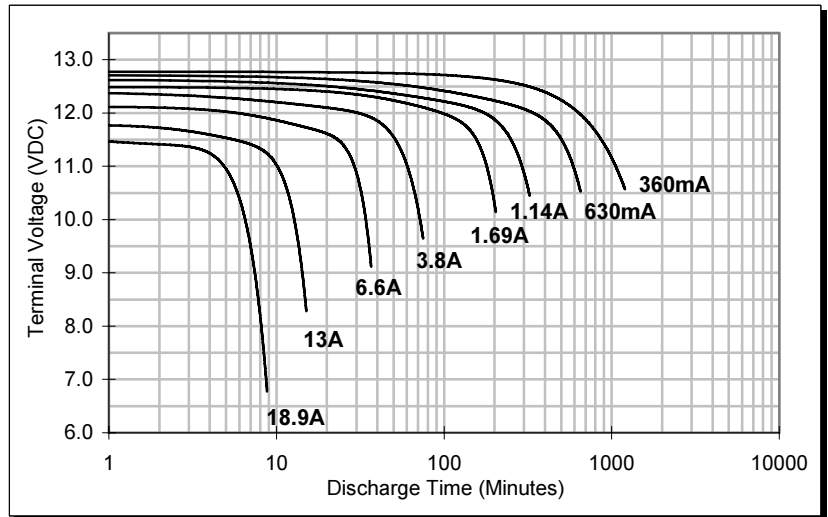

Recharge Method : Connect battery to a Current Limited, Constant Voltage Source.

- Limit the Initial Recharge Current to 1.8 Amperes or less.
- To promote satisfactory performance in Cyclic Applications, a minimum Recharge Current of 720 mA is recommended.
- Employ Charge Voltage Temperature Compensation when Battery Temperature is less than 50°F (10°C) or greater than 86°F (30°C). Use the **Recommended** Voltage and Normalize to 77°F (25°C).
- The use of Compensation through the whole Temperature range is not generally necessary, but doing so may optimize Service Life.
- If the **Recommended** Recharge voltage is used, no Temperature Compensation is required within the range of 50~86°F (10~30°C).

Cyclic Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
14.40	14.55	14.70	Volts D.C. Per Cell
2.40	2.425	2.45	

Temperature Coefficient: -2.8mV / °F / Cell (- 5mV / °C / Cell)

Standby Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
13.50	13.65	13.80	Volts D.C. Per Cell
2.25	2.275	2.30	

Temperature Coefficient: -1.7mV / °F / Cell (- 3mV / °C / Cell)