

INFINITY

BATTERY

IT26-12

RECHARGEABLE SEALED LEAD ACID (VRLA) BATTERY



Nominal Voltage 12 Volt

20 Hour Rate Capacity 26 Ah

Dimensions	Inches	mm
Length	6.54	166
Width	6.89	175
Case Height	4.92	125
Terminal Height	4.92	125

Weight (Approx.)	Lbs.	Kg
	20.75	9.41

Constant Current Discharge Characteristics at 73.4°F (23°C)

Discharge Time	Discharge Amperes	Capacity in Ah's	Final Voltage	Discharge C-Rate
20.0 Hrs	1.30	26.00	10.50	0.05
9.2 Hrs	2.60	24.05	10.50	0.10
5.0 Hrs	4.42	22.03	10.29	0.17
4.1 Hrs	5.20	21.17	10.20	0.20
2.1 Hrs	9.10	19.37	9.94	0.35
64.0 Mins	15.6	16.64	9.54	0.6
32.5 Mins	26	14.06	9.00	1.0
7.2 Mins	78	9.33	6.00	3.0

Case Material A.B.S. (UL94-HB)

Terminal NUT & BOLT (M5)

Maximum Short Duration Discharge Current
 (5 Seconds or Less) 390 Amperes
 (10 Seconds or Less) 260 Amperes
 (60 Seconds or Less) 156 Amperes


Internal Resistance (Fully Charged Battery)
 (Approximately) 8 mOhm

Energy Density (@ 20 Hour Rate)
 1.41 Watt-Hours/Cubic Inch (85.92 Watt-Hours/Litre)

Specific Energy (@ 20 Hour Rate)
 15.04 Watt-Hours / Pound (33.15 Watt-Hours / Kg)

Operating Temperature Range
Discharge 5°F (-15°C) ~ 122°F (50°C)
Recharge 32°F (0°C) ~ 104°F (40°C)
Storage 32°F (0°C) ~ 104°F (40°C)

Self Discharge Rate
 About 3% / Month @ 68~77°F (20~25°C)

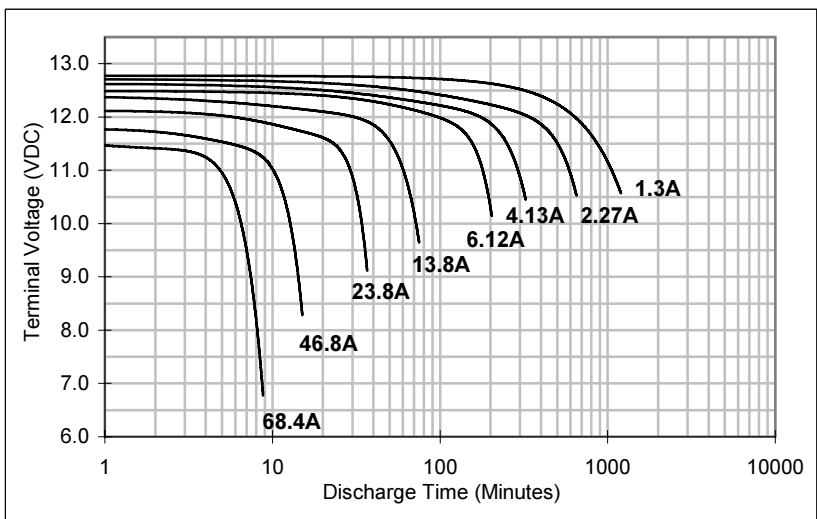

Recharge Method : Connect battery to a Current Limited, Constant Voltage Source.

- Limit the Initial Recharge Current to 6.5 Amperes or less.
- To promote satisfactory performance in Cyclic Applications, a minimum Recharge Current of 2.6 Amperes is recommended.
- Employ Charge Voltage Temperature Compensation when Battery Temperature is less than 50°F (10°C) or greater than 86°F (30°C). Use the **Recommended** Voltage and Normalize to 77°F (25°C).
- The use of Compensation through the whole Temperature range is not generally necessary, but doing so may optimize Service Life.
- If the **Recommended** Recharge voltage is used, no Temperature Compensation is required within the range of 50~86°F (10~30°C).

Cyclic Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
14.40	14.55	14.70	Volts D.C. Per Cell
2.40	2.425	2.45	

Temperature Coefficient: -2.8mV / °F / Cell (- 5mV / °C / Cell)

Standby Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
13.50	13.65	13.80	Volts D.C. Per Cell
2.25	2.275	2.30	

Temperature Coefficient: -1.7mV / °F / Cell (- 3mV / °C / Cell)